

MSP316D

HDMI Inline Switcher




Key Features

- Dual operation modes – 1 in 2 out or 2 in 1 out
- Active – no external power supply needed
- Easy operation with button press mode switching
- HDMI 2.0 Compliant
- Signals up to 4K60
- Support for transmission up to 5m


Specification

Connectors	Input	HDMI	1×HDMI-A Or 2×HDMI-A
	Output	HDMI	2×HDMI-A Or 1×HDMI-A
Performance	Input Resolutions	HDMI	SMPTE 480i 576i 720p@59.94/60 1080i@50/59.94/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×2160@60 4096×2160@60
	Output Resolutions	HDMI	SMPTE 720p@59.94/60 1080i@50/59.94/60 1080p@23.98/24/25/29.97/30/50/59.94/60 2160p@30/60 VESA 800×600@60 1024×768@60 1280×768@60 1280×1024@60 1366×768@60 1600×1200@60 1920×1080@60 2048×1152@60 2560×1600@60 3840×2160@60 4096×2160@60
	Supported Standard	HDMI 2.0	
Environment	Working Temperature	-20°C - 60°C	
	Humidity	20 - 90%	
Physical	Weight	Net (Device) 0.1 kg	
	Dimensions	Net (Device) 60mm×55mm×18mm	

Application

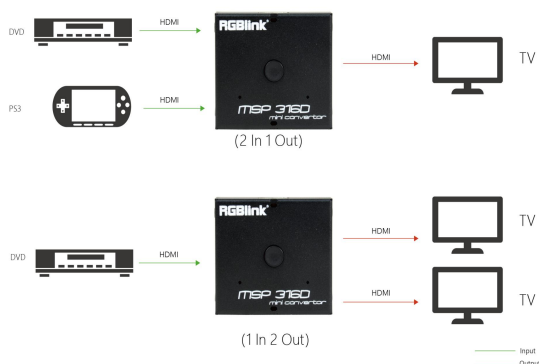

Dimension

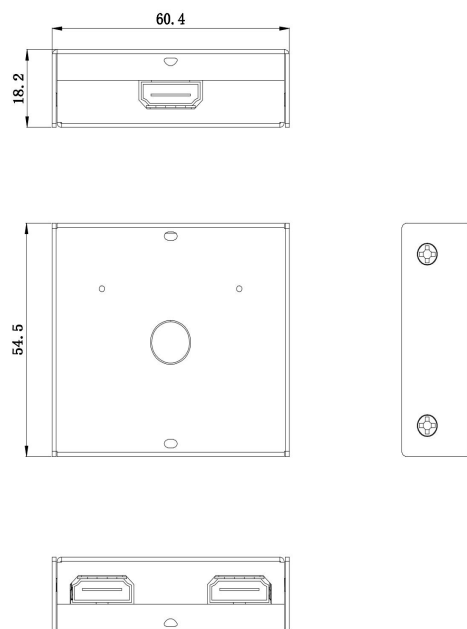

Order Codes

Product Code	Item
621-0316-02-0	MSP316D

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com
Headquarter: S601 Weiye Building, Torch Hi-Tech Development Zone, Xiamen, Fujian, P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

RGBlink[®]

www.rgbink.com

